

CLUX-C81C

8 by 1 HDMI Switcher with CEC

Operation Manual



Vertrieb durch
Distribution by

HY-LINE[®]
COMPUTER COMPONENTS
Inselkammerstr. 10
D-82008 Unterhaching
Tel.: +49 89 614 503 40
www.hy-line.de

• **Disclaimers**

The information in this manual has been carefully checked and is believed to be accurate. Cypress Technology assumes no responsibility for any infringements of patents or other rights of third parties which may result from its use.

Cypress Technology assumes no responsibility for any inaccuracies that may be contained in this document. Cypress also makes no commitment to update or to keep current the information contained in this document.

Cypress Technology reserves the right to make improvements to this document and/or product at any time and without notice.

• **Copyright Notice**

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or any of its part translated into any language or computer file, in any form or by any means - electronic, mechanical, magnetic, optical, chemical, manual, or otherwise - without express written permission and consent from Cypress Technology.

© Copyright 2009 by Cypress Technology.

All Rights Reserved.

Version 1.0 July 2009

• **Trademark Acknowledgments**

All products or service names mentioned in this document may be trademarks of the companies with which they are associated.

Vertrieb durch
Distribution by

HY-LINE[®]
COMPUTER COMPONENTS
Inselkammerstr. 10
D-82008 Unterhaching
Tel.: +49 89 614 503 40
www.hy-line.de

• **Safety Precautions**

Please read all instructions before attempting to unpack or install or operate this equipment, and before connecting the power supply. Please keep the following in mind as you unpack and install this equipment:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Never spill liquid of any kind on or into this product.
- Never push an object of any kind into this product through module openings or empty slots, as you may damage parts.
- Do not attach the power supply cabling to building surfaces.
- Do not allow anything to rest on the power cabling or allow it to be abused by persons walking on it.
- To protect the equipment from overheating, do not block the slots and openings in the module housing that provide ventilation.

• **Revision History**

| Version No | Date | Summary of Change |
|-------------------|-----------------|----------------------------|
| V1 | 20090717 | Preliminary Release |
| VR2 | 20120201 | RS-232 Command |

Vertrieb durch
Distribution by

HY-LINE®
COMPUTER COMPONENTS
Inselkammerstr. 10
D-82008 Unterhaching
Tel.: +49 89 614 503 40
www.hy-line.de

Table of Contents

| | | |
|-----|---|---|
| 1. | Introduction | 1 |
| 2. | Applications | 1 |
| 3. | Package Contents | 1 |
| 4. | System Requirements | 1 |
| 5. | Features | 2 |
| 6. | Specifications | 3 |
| 7. | Operation Controls and Functions | 3 |
| | 7.1 Front Panel..... | 4 |
| | 7.2 Rear Panel..... | 5 |
| 8. | Remote Control | 5 |
| 9. | RS-232 Protocol | 5 |
| | 9.1 Pin Definitions..... | 6 |
| | 9.2 RS-232 Commands..... | 7 |
| 10. | Connection and Installation | 8 |
| 11. | Acronyms | 9 |

Vertrieb durch
Distribution by

HY-LINE[®]
COMPUTER COMPONENTS
Inselkammerstr. 10
D-82008 Unterhaching
Tel.: +49 89 614 503 40
www.hy-line.de

1. Introduction

This is a high performance HDMI switcher that allows for various HDMI sources to share one HDTV display. This device features CEC control functions and supports deep color, xvYCC and RS-232 control. Simply press one button select your desired HDMI source to display on the HDTV or use remote control to control your sources from a distance. Switching from one HDMI input source to another will no longer be an inconvenience.

2. Applications

- Multi-sources with one display
- Showroom display
- Educational presentation

3. Package Contents

- 8 by 1 HDMI v1.3 Switcher
- Remote Control (CR-63 with battery)
- 5V DC Power Supply Adaptor
- Operation Manual

4. System Requirements

Input source equipments, output displayer with HDMI cables.

Vertrieb durch
Distribution by

HY-LINE[®]
COMPUTER COMPONENTS
Inselkammerstr. 10
D-82008 Unterhaching
Tel.: +49 89 614 503 40
www.hy-line.de

5. Features

- HDMI and HDCP 1.1 compliant
- Supports deep color display RGB/YCbCr 4:4:4 24/30/36 bits
- Supports color space YCbCr 4:2:2 16/20/24 bits
- Supports high definition audio – Dolby Digital True HD® and DTS-HD®
- Signal Enhancement feature allows signal quality improvement after long distance transmission
- HDMI cable distance test with 1080p/8-bit resolution, the input/output can reach up to 15/15 meters. If running at 1080p/12-bit, the input/output can reach at up to 15/6 meters
- PC resolution supports: VGA, SVGA, XGA, SXGA, and UXGA (1600 x 1200)
- HD resolution supports: 480i ~1080p 50/60 and 1080p 24
- PC resolution supports: VGA, SVGA, XGA, SXGA, and UXGA (1600 x 1200)
HD resolution supports: 480i ~1080p 50/60 and 1080p 24
- With remote control function
- Supports RS232 operation
- Supports CEC control function
- Supports xvYCC

Vertrieb durch
Distribution by

HY-LINE®
COMPUTER COMPONENTS
Inselkammerstr. 10
D-82008 Unterhaching
Tel.: +49 89 614 503 40
www.hy-line.de

6. Specifications


| | |
|-----------------------|---|
| Frequency Bandwidth | 2.25Gbps(single link) |
| Input Ports | 8 x HDMI female ports (Type A connector) |
| Output Ports | 1 x RS232 1 x HDMI female port (single link) |
| Color Space | YCbCr 4:2:2 16/20/24 bits |
| Deep Color | RGB / YCbCr 4:4:4 24/30/36 bits |
| ESD Protection | Human body model: $\pm 10\text{kV}$ (air-gap discharge) $\pm 6\text{kV}$ (contact discharge) |
| Input TMDS signal | 1.2 Volts (peak-to-peak) |
| Input DDC signal | 5 Volts (peak-to-peak, TTL) |
| Power Supply | 5V/1A |
| Weight(g) | 850 g |
| Dimensions(mm) | 280 mm (W) \times 104 mm (D) \times 44 mm (H) |
| Chassis Material | Metal |
| Silkscreen Color | Black |
| Operating Temperature | 0°C~40°C / 32°F ~ 104°F |
| Storage Temperature | -20°C~60°C / -4°F ~ 140°F |
| Relative Humidity | 20%~90% RH (non-condensing) |
| Power Consumption | 4.1W |

Vertrieb durch
Distribution by

HY-LINE[®]
COMPUTER COMPONENTS
Inselkammerstr. 10
D-82008 Unterhaching
Tel.: +49 89 614 503 40
www.hy-line.de

7. Operation Controls and Functions

7.1 Front Panel

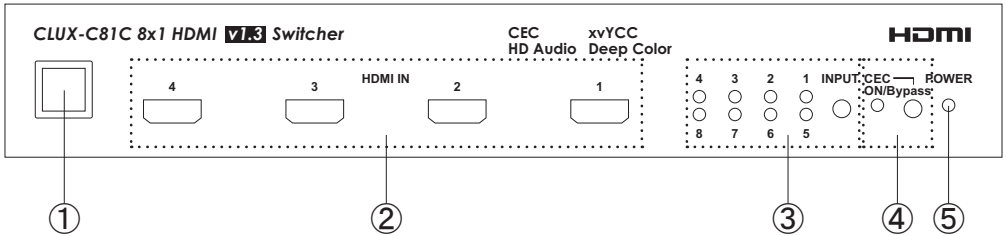


- ① Remote control sensor.
- ② HDMI IN 1~4: These slots connect to the HDMI/DVI output ports of your source equipments. ie, set- up-box, DVD or Blue Ray.
- ③ Input select indicators: Press the "INPUT" button repeatedly to switch to your desired input source. The LED that illuminates indicate the corresponding input source is selected.
- ④ CEC button indicator: When the LED illuminate it means CEC is ON. Press again to switch CEC to bypass mode and the LED will not illuminate which means the CEC function will be terminate.
Note: Both input source and output display must support CEC function for the switcher to properly perform CEC.
- ⑤ POWER indicator: When power is connected to the device, the device automatically turns on and the power LED will turn red.
Note: To turn ON or switch the device to standby mode, please press the "POWER" button on the remote control unit.

Vertrieb durch
Distribution by

HY-LINE[®]
COMPUTER COMPONENTS
Inselkammerstr. 10
D-82008 Unterhaching
Tel.: +49 89 614 503 40
www.hy-line.de

7.2 Rear Panel

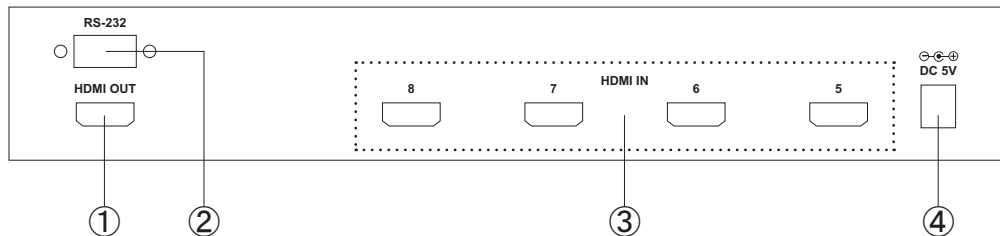


- ① HDMI OUT: This is the slot where you connect the HDMI output of the switcher to the HDMI input of your display using a HDMI cable.
- ② RS-232 input: When doing firmware upgrade and/or PC remote system control, connect a D-sub 9 pin cable from this RS232 slot to your computer.
- ③ HDMI IN 5~8: These slots connect to the HDMI/DVI output ports of your source equipments. ie, set- up-box, DVD or Blue Ray.
- ④ DC 5V: Connect the 5V DC power adaptor into this slot and plug the adaptor to an AC wall outlet.

Vertrieb durch
Distribution by

HY-LINE[®]
COMPUTER COMPONENTS
Inselkammerstr. 10
D-82008 Unterhaching
Tel.: +49 89 614 503 40
www.hy-line.de

8. Remote Control

- ① Power: This button turns on the unit or set the device to standby mode.
- ② CEC: This button turns on the CEC function of the unit or set it to bypass mode.
- ③ Input selector: Buttons 1~8 to select the desired input sources.

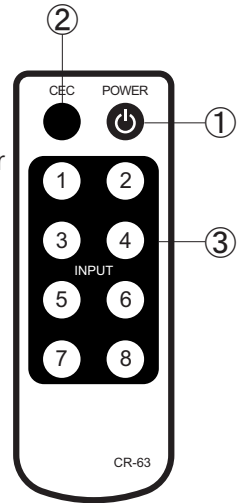

9. RS-232 Protocol

9.1 Pin Definitions

| Switcher | | | Remote Controller | |
|----------|------------|---|-------------------|------------|
| PIN | Assignment | | PIN | Assignment |
| 1 | NC | | 1 | NC |
| 2 | TxD | → | 2 | RxD |
| 3 | RxD | ← | 3 | TxD |
| 4 | NC | | 4 | NC |
| 5 | GND | | 5 | GND |
| 6 | NC | | 6 | NC |
| 7 | NC | | 7 | NC |
| 8 | NC | | 8 | NC |
| 9 | NC | | 9 | NC |

Baud Rate: 19200 bps

Data Bit: 8 bits

Parity: None

Stop Bit: 1 bit

Flow Control: None

Vertrieb durch
Distribution by

HY-LINE[®]
COMPUTER COMPONENTS
Inselkammerstr. 10
D-82008 Unterhaching
Tel.: +49 89 614 503 40
www.hy-line.de




9.2 RS-232 Command

| Command Code | Function |
|--------------|--------------|
| I1 | PORT 1 ON |
| I2 | PORT 2 ON |
| I3 | PORT 3 ON |
| I4 | PORT 4 ON |
| I5 | PORT 5 ON |
| I6 | PORT 6 ON |
| I7 | PORT 7 ON |
| I8 | PORT 8 ON |
| C1 | CEC ON |
| C0 | CEC OFF |
| P1 | POWER ON |
| P0 | POWER OFF |
| S | REPORT STATE |

Notes:

1. The command is a combination of characters and digits with case-insensitive.

10. Connection and Installation

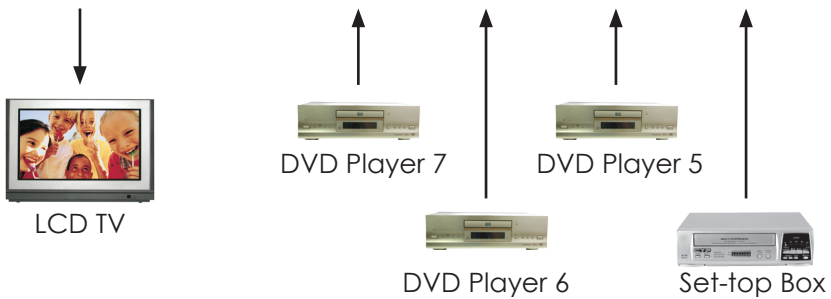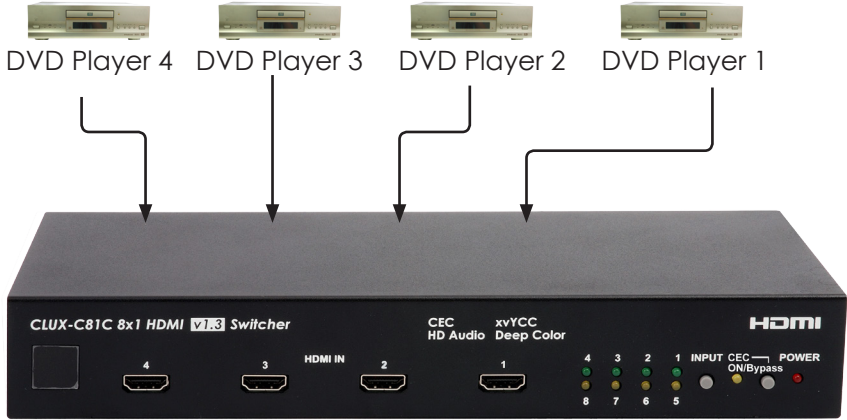



Acronyms

| Acronym | Complete Term |
|----------------|---|
| CEC | Consumer Electronics Control |
| DTS | Digital Theater System |
| HDCP | High-bandwidth Digital Content Protection |
| HDMI | High-Definition Multimedia Interface |
| HDTV | High-Definition Television |
| RGB | Red Green Blue |
| SVGA | Super Video Graphics Array |
| SXGA | Supper Extended Graphics Array |
| UXGA | Ultra Extended Graphics Array |
| VGA | Video Graphics Array |
| XGA | Extended Graphics Array |



CYPRESS TECHNOLOGY CO., LTD.
Home page: <http://www.cypress.com.tw>

20090703 MPM-CLUXC81C